

# Interactive Whiteboard

Touch-Sensitive Surface

Interact  
Explore  
Enlighten



Interactive Projection on a Touch-sensitive Surface



Optional Wireless Communication



Optional Enclosures and Mobile Stands

PolyVision's TS Series of Interactive Whiteboards is ideal for power users who prefer to learn product-specific software.

### Keep Your Audience Focused

Dramatically improve group interactivity by allowing participants to listen and engage. PolyVision's TS series digitally captures any notes written or projected onto the board, so your audience can focus on the session content rather than concentrating on taking notes.

### Maintain Message Consistency

There is little room for miscommunication when all session participants have the same notes; simply save your work to a computer for later distribution.

Notes can be provided in your choice


of format: via e-mail, Internet, intranet, or printed copies.

### Enjoy your Free Time

Projection-oriented users prefer a digital presentation format to a written format; often spending a lot of time creating an interactive experience for the audience. The TS series helps to eliminate the time crunch by capturing notes and annotations on projected images, so it's easy to review the notes made during previous sessions and digitally update presentations accordingly - an ideal solution for educators who specialize in one subject area.

TS Series Interactive Whiteboards:  
Present an interactive experience.

**POLYVISION**  
A Steelcase Company

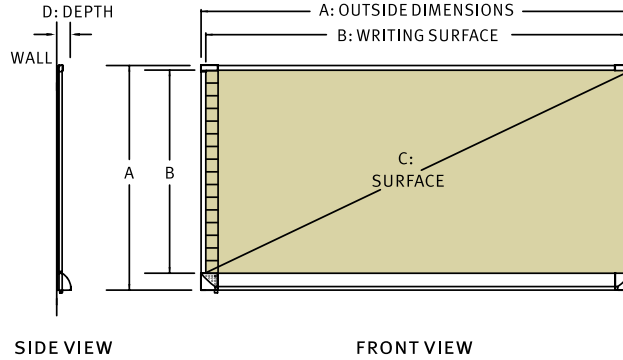

Interactive Whiteboard	Models TS 400, TS 410	Models TS 600, TS 610	Models TS 800, TS 810
Dimension A (HxW)	39.7" x 47.0" (1010mm x 1190mm)	47.7" x 67.0" (1210mm x 1700mm)	47.7" x 97.0" (1210mm x 2460mm)
Dimension B (HxW)	35.0" x 45.0" (889mm x 1140mm)	43.0" x 65.0" (1090mm x 1650mm)	43.0" x 95.0" (1090mm x 2410mm)
Dimension C (Diagonal)	56.9" (1446mm)	77.8" (1976mm)	104.3" (2649mm)
Dimension D (Depth)	3.0" (76.2mm)	3.0" (76.2mm)	3.0" (76.2mm)
Resolution	8000 x 8000	8000 x 8000	8000 x 8000
Weight	30 lbs. (13.62 kg)	55 lbs. (24.97 kg)	70 lbs. (31.78 kg)

#### Surface material

Touch-sensitive, low-glare, stain-resistant Teflon® surface

#### Power Requirements

- TS 400, 600, 800: 120V/240V wall mounted power supply 8VDC, 5W (max)
- TS 410, 610, 810: USB powered

#### Certification

CE, FCC Class A, RoHS (TS 410, 610, 810 only)

#### Software Features

- Transfer images via drag & drop, clipboard, or file export
- Anti-aliased markup including highlighters
- Real-time playback
- Multiple monitor support
- Save images in JPG, BMP, TIFF, WMF, HTM, PDF, PCT, MacPaint, PSD, PNG, Quicktime Image, and TGA

#### Warranty

Two-year limited warranty, free upgrade to five years upon product registration

#### Accessories (Included)

- One (1) 3.25" (830 mm) round eraser
- 12' (3.6m) 9-pin serial cable for TS 400; 20' (6.1m) for TS 600 and TS 800
- 15' (5m) USB cable for TS 410, 610, 810
- Stylus
- User guide

#### Recommended Computer Requirements

Microsoft Windows®:

- Windows 98, 2000, ME, XP, or Tablet XP
- 128 MB RAM
- One available USB port
- TS 400, 600, 800: One serial port
- TS 410, 610, 810: One USB port

Apple Macintosh®:

- Power PC or Intel processor
- Mac OS 10.2 or higher
- 256 MB RAM (higher screen resolutions require more memory)
- One available USB port
- TS 400, 600, 800: One serial port
- TS 410, 610, 810: One USB port

#### Options

- 9-pin serial to USB adapter (for TS 400, 600, 800) (440-0021-01)
- Mobile stand - supports models TS 400, 410, 600, 610 (MS Series)
- Wireless for TS 400, 600 or 800 only: Room-blasting infrared (TS Wireless) or Bluetooth® (TS BT)

Authorized PolyVision Dealer

PolyVision Corporation  
1.800.620.POLY  
info@polyvision.com  
www.polyvision.com

**POLYVISION**  
A Steelcase Company